

## ON-PRESS EXPOSURE AND ON-PRESS PROCESSING OF A LITHOGRAPHIC MATERIAL

### CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

**[0001]** This patent application claims priority to Patent Application No. 01000017.2, filed in Europe on February 16, 2001, which is incorporated by reference. This application further claims the benefit of Provisional Application No. 60/274,159 filed March 8, 2001, which is incorporated by reference.

### FIELD OF THE INVENTION

**[0002]** The present invention relates to a method of lithographic printing wherein an imaging material is unrolled from a supply roll, wrapped around a cylinder of a printing press, image-wise exposed and processed by supplying single-fluid ink.

### BACKGROUND OF THE INVENTION

**[0003]** Lithographic printing presses use a so-called printing master such as a printing plate which is mounted on a cylinder of the printing press. The master carries a lithographic image on its surface and a print is obtained by applying ink to said image and then transferring the ink from the master onto a receiver material, which is typically paper. In conventional lithographic printing, ink as well as an aqueous fountain solution (also called dampening liquid) are supplied to the lithographic image which consists of oleophilic (or hydrophobic, i.e. ink-accepting, water-repelling) areas as well as hydrophilic (or oleophobic, i.e. water-accepting, ink-repelling) areas. In so-called driographic printing, the lithographic image consists of ink-accepting and ink-abhesive (ink-repelling) areas and during driographic printing, only ink is supplied to the master.


**[0004]** Printing masters are generally obtained by the so-called computer-to-film method wherein various pre-press steps such as typeface selection, scanning, color separation, screening, trapping, layout and imposition are accomplished digitally and each color selection is transferred to graphic arts film using an image-setter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after plate processing, a printing plate is obtained which can be used as a master.

**[0005]** In recent years the so-called computer-to-plate (CTP) method has gained a lot of interest. This method, also called direct-to-plate method, bypasses the creation of film

because the digital document is transferred directly to a plate precursor by means of a so-called plate-setter. A special type of CTP processes involves the exposure of a plate precursor while being mounted on a plate cylinder of a printing press by means of an image-setter that is integrated in the press. This method may be called 'computer-to-press' and printing presses with an integrated plate-setter are sometimes called digital presses. A review of digital presses is given in the Proceedings of the Imaging Science & Technology's 1997 International Conference on Digital Printing Technologies (Non-Impact Printing 13). Computer-to-press methods have been described in e.g. EP-A 770 495, EP-A 770 496, WO 94001280, EP-A 580 394 and EP-A 774 364. EP-A 640 478 describes a digital press with an automatic plate-loading system comprising a supply roll and an uptake roll within the plate cylinder.

**[0006]** Typical plate materials used in computer-to-press methods are based on ablation. A problem associated with ablative plates is the generation of debris which is difficult to remove and may disturb the printing process or may contaminate the exposure optics of the integrated image-setter. Other methods require wet processing with chemicals which may damage or contaminate the electronics and optics of the integrated image-setter and other devices of the press. Therefore, lithographic coatings which require no wet processing or may be processed with plain water, ink or fountain is especially desired in computer-to-press methods. WO 90002044, WO 91008108 and EP-A 580 394 disclose such plates, which are, however, all ablative plates having a multi-layer structure which makes them less suitable for on-press coating. U.S. Pat. 6,095,048 discloses the processing of an ablation-type material with a single-fluid ink.

**[0007]** A non-ablative plate which can be processed with fountain and ink is described in EP-B 770 494. The latter patent specification discloses a method wherein an imaging material comprising an image-recording layer of a hydrophilic binder, a compound capable of converting light to heat and hydrophobic thermoplastic polymer particles, is image-wise exposed, thereby converting the exposed areas into an hydrophobic phase which define the printing areas of the printing master. The press run can be started immediately after exposure without any additional treatment because the layer is processed by interaction with the fountain and ink that are supplied to the cylinder during the press run. So the wet chemical processing of these materials is 'hidden' to the user and accomplished during the first runs of the printing press.

[0008] A problem associated with the latter method is that the on-press processing is done by the steps of first supplying fountain to the plate and subsequently also ink, which can easily be carried out in printing presses wherein the ink and fountain rollers can be engaged independently from one another. However, it is more difficult to optimize on-press processing by the simultaneous application of fountain and ink, which is the only option in printing presses which are equipped with an integrated ink/fountain supply. 

[0009] In addition, processing of plate materials by fountain is not possible in a driographic press since only ink is supplied to the plate in such presses. Driographic presses need careful temperature control because there is no cooling effect from an aqueous fountain liquid.

[0010] So there is need for a method wherein on-press processing of an imaging material can be achieved without the supply of aqueous fountain liquid.

#### BRIEF SUMMARY OF THE INVENTION

[0011] It is an object of the present invention to provide a method of lithographic printing with automatic plate-loading and on-press exposure which enables on-press processing in all lithographic printing presses, also those that contain no fountain supply. In that way, a fully automatic printing method is obtained wherein all the steps of plate-loading, exposure and processing can be carried out without human intervention.

[0012] This object is realized by the method of claim 1. It has been found that excellent results can be obtained by using a single-fluid ink for the on-press processing of an imaging material comprising an image-recording layer which is soluble in such a single-fluid ink or can be rendered soluble in the single-fluid ink by the exposure step. Single-fluid ink is generally understood as an emulsion of an ink phase in a polar phase, or vice-versa, an emulsion of a polar phase in an ink phase. Single-fluid ink allows printing with a conventional, wet lithographic printing master without the application of a dampening liquid. The ink phase adsorbs onto the hydrophobic areas of the printing master and the polar phase wets the hydrophilic areas, thereby preventing adsorption of the ink component on the non-printing portions of the lithographic image.

[0013] The printing method of the present invention is a cycle of steps (i) through (vi) as defined in claim 1 and this cycle can be repeated several times, the exact number being dependent on the length of the web of the imaging material that is present on the supply roll.

Preferably the number of print cycles is larger than 1, more preferably larger than 10 and most preferably larger than 30. Since plate changing and loading is fully automatic, the press down time between print cycles is minimized.

[0014] Further objects of the present invention will become apparent from the detailed description. Specific features for preferred embodiments of the invention are set out in the dependent claims.

#### DETAILED DESCRIPTION OF THE INVENTION

[0015] The imaging material used in the present invention comprises a flexible lithographic base and an image-recording layer.

[0016] The lithographic base comprises a support in web form that is sufficiently flexible so that it can be wound on a spool. The support has a hydrophilic surface or is provided with a hydrophilic layer. The flexible support may consist of paper, plastic, a thin metal such as aluminum, or a composite or a laminate thereof, e.g. a laminate of plastic and metal. A highly preferred example is a PET film laminated to aluminum which is sufficiently thin to allow winding on a spool. Preferred examples of plastic film are polyethylene terephthalate (PET) film, polyethylene naphthalate film, cellulose acetate film, polystyrene film, polycarbonate film, etc. The plastic film support may be opaque or transparent.

[0017] A particularly preferred lithographic base having a hydrophilic surface is an electrochemically grained and anodized aluminum support. The anodized aluminum support may be treated to improve the hydrophilic properties of its surface. For example, the aluminum support may be silicated by treating its surface with a sodium silicate solution at elevated temperature, e.g. 95 °C. Alternatively, a phosphate treatment may be applied which involves treating the aluminum oxide surface with a phosphate solution that may further contain an inorganic fluoride. Further, the aluminum oxide surface may be rinsed with a citric acid or citrate solution. This treatment may be carried out at room temperature or may be carried out at a slightly elevated temperature of about 30 to 50 °C. A further interesting treatment involves rinsing the aluminum oxide surface with a bicarbonate solution. Still further, the aluminum oxide surface may be treated with polyvinylphosphonic acid, polyvinylmethylphosphonic acid, phosphoric acid esters of polyvinyl alcohol, polyvinylsulfonic acid, polyvinylbenzenesulfonic acid, sulfuric acid esters of polyvinyl alcohol, and acetals of polyvinyl alcohols formed by reaction with a

sulfonated aliphatic aldehyde. It is further evident that one or more of these post treatments may be carried out alone or in combination. More detailed descriptions of these treatments are given in GB-A- 1 084 070, DE-A- 4 423 140, DE-A- 4 417 907, EP-A- 659 909, EP-A- 537 633, DE-A- 4 001 466, EP-A- 292 801, EP-A- 291 760 and US-P- 4 458 005.

**[0018]** A support which has no hydrophilic surface may be provided with a hydrophilic layer, called base layer. The base layer is preferably a cross-linked hydrophilic layer obtained from a hydrophilic binder cross-linked with a hardening agent such as formaldehyde, glyoxal, polyisocyanate or a hydrolyzed tetra-alkylorthosilicate. The latter is particularly preferred. The thickness of the hydrophilic base layer may vary in the range of 0.2 to 25  $\mu\text{m}$  and is preferably 1 to 10  $\mu\text{m}$ .

**[0019]** The hydrophilic binder for use in the base layer is e.g. a hydrophilic (co)polymer such as homopolymers and copolymers of vinyl alcohol, acrylamide, methylol acrylamide, methylol methacrylamide, acrylate acid, methacrylate acid, hydroxyethyl acrylate, hydroxyethyl methacrylate or maleic anhydride/vinylmethylether copolymers. The hydrophilicity of the (co)polymer or (co)polymer mixture used is preferably the same as or higher than the hydrophilicity of polyvinyl acetate hydrolyzed to at least an extent of 60% by weight, preferably 80% by weight.

**[0020]** The amount of hardening agent, in particular tetraalkyl orthosilicate, is preferably at least 0.2 parts per part by weight of hydrophilic binder, more preferably between 0.5 and 5 parts by weight, most preferably between 1 parts and 3 parts by weight.

**[0021]** The hydrophilic base layer may also contain substances that increase the mechanical strength and the porosity of the layer. For this purpose colloidal silica may be used. The colloidal silica employed may be in the form of any commercially available water dispersion of colloidal silica for example having an average particle size up to 40 nm, e.g. 20 nm. In addition inert particles of larger size than the colloidal silica may be added e.g. silica prepared according to Stöber as described in J. Colloid and Interface Sci., Vol. 26, 1968, pages 62 to 69 or alumina particles or particles having an average diameter of at least 100 nm which are particles of titanium dioxide or other heavy metal oxides. By incorporating these particles, the surface of the hydrophilic base layer is given a uniform rough texture consisting of microscopic hills and valleys, which serve as storage places for water in background areas.

[0022] Particular examples of suitable hydrophilic base layers for use in accordance with the present invention are disclosed in EP-A- 601 240, GB-P- 1 419 512, FR-P- 2 300 354, U.S. Pat. 3 971 660, and U.S. Pat. 4 284 705.

[0023] It is particularly preferred to use a film support to which an adhesion improving layer, also called subbing layer, has been provided. Particularly suitable adhesion improving layers for use in accordance with the present invention comprise a hydrophilic binder and colloidal silica as disclosed in EP-A- 619 524, EP-A- 620 502 and EP-A- 619 525. Preferably, the amount of silica in the adhesion-improving layer is between 200 mg/m<sup>2</sup> and 750 mg/m<sup>2</sup>. Further, the ratio of silica to hydrophilic binder is preferably more than 1 and the surface area of the colloidal silica is preferably at least 300 m<sup>2</sup>/gram, more preferably at least 500 m<sup>2</sup>/ gram.

[0024] The imaging material comprises at least one image-recording layer provided on the lithographic base. Preferably, only a single layer is provided on the base. The material may be light- or heat-sensitive, the latter being preferred because of daylight-stability. The image-recording layer of the material used in the present invention is preferably non-ablative. The term "non-ablative" shall be understood as meaning that the image-recording layer is not substantially removed during the exposure step. The material can be positive-working, i.e. the exposed areas of the image-recording layer are rendered removable with the single-fluid ink, thereby revealing the hydrophilic surface of the lithographic base which defines the non-printing areas of the master, whereas the non-exposed areas are not removable with the single-fluid ink and define the hydrophobic, printing areas of the master. In a more preferred embodiment, the material is negative-working, i.e. the unexposed areas of the image-recording layer are removable with the single-fluid ink, thereby revealing the hydrophilic surface of the lithographic base which defines the non-printing areas of the master, whereas the exposed areas are not removable with the single-fluid ink and define the hydrophobic, printing areas of the master. The term removable indicates that the image-recording layer can be removed from the lithographic base by the supply of single-fluid ink, e.g. by dissolution of the layer in the single-fluid ink or by the formation of a dispersion or emulsion of the layer in the single-fluid ink.

[0025] In a preferred embodiment, the imaging material is negative-working and comprises an image-recording layer that is removable with the single-fluid ink before exposure and is rendered less removable upon exposure. Two highly preferred embodiments of such a negative-working image-recording layer will now be discussed.

**[0026]** In a first highly preferred embodiment, the working mechanism of the imaging layer relies on the heat-induced coalescence of hydrophobic thermoplastic polymer particles, preferably dispersed in a hydrophilic binder, as described in e.g. EP 770 494; EP 770 495; EP 770 497; EP 773 112; EP 774 364; and EP 849 090. The coalesced polymer particles define a hydrophobic, printing area which is not readily removable with the single-fluid ink whereas the unexposed layer defines a non-printing area which is readily removable with the single-fluid ink. The thermal coalescence can be induced by direct exposure to heat, e.g. by means of a thermal head, or by the light absorption of one or more compounds that are capable of converting light, more preferably infrared light, into heat. Particularly useful light-to-heat converting compounds are for example dyes, pigments, carbon black, metal carbides, borides, nitrides, carbonitrides, bronze-structured oxides, and conductive polymer dispersions such as polypyrrole, polyaniline or polythiophene-based conductive polymer dispersions. Infrared dyes and carbon black are highly preferred.


**[0027]** The hydrophobic thermoplastic polymer particles preferably have a coagulation temperature above 35 °C and more preferably above 50 °C. Coagulation may result from softening or melting of the thermoplastic polymer particles under the influence of heat. There is no specific upper limit to the coagulation temperature of the thermoplastic hydrophobic polymer particles, however the temperature should be sufficiently below the decomposition of the polymer particles. Preferably, the coagulation temperature is at least 10 °C below the temperature at which the decomposition of the polymer particles occurs. Specific examples of hydrophobic polymer particles are e.g. polyethylene, polyvinyl chloride, polymethyl (meth)acrylate, polyethyl (meth)acrylate, polyvinylidene chloride, polyacrylonitrile, polyvinyl carbazole, polystyrene or copolymers thereof. Most preferably used is polystyrene. The weight average molecular weight of the polymers may range from 5,000 to 1,000,000g/mol. The hydrophobic particles may have a particle size from 0.01 µm to 50 µm, more preferably between 0.05 µm and 10 µm and most preferably between 0.05 µm and 2 µm. The amount of hydrophobic thermoplastic polymer particles contained in the image forming layer is preferably between 20% by weight and 65% by weight and more preferably between 25% by weight and 55% by weight and most preferably between 30% by weight and 45% by weight.

**[0028]** Suitable hydrophilic binders are for example synthetic homo- or copolymers such as a polyvinylalcohol, a poly(meth)acrylic acid, a poly(meth)acrylamide, a

polyhydroxyethyl(meth)acrylate, a polyvinylmethylether or natural binders such as gelatin, a polysaccharide such as e.g. dextran, pullulan, cellulose, arabic gum, alginic acid.

**[0029]** In the second highly preferred embodiment, the imaging layer comprises an aryldiazosulfonate homo- or copolymer that is hydrophilic and soluble in the single-fluid ink before exposure and rendered hydrophobic and less soluble after such exposure. The exposure can be done by the same means as discussed above in connection with thermal coalescence of polymer particles. Alternatively, the aryldiazosulfonate polymer can also be switched by exposure to UV light, e.g. by a UV laser or a UV lamp.


**[0030]** Preferred examples of such aryldiazosulfonate polymers are the compounds which can be prepared by homo- or copolymerization of aryldiazosulfonate monomers with other aryldiazosulfonate monomers and/or with vinyl monomers such as (meth)acrylic acid or esters thereof, (meth)acrylamide, acrylonitrile, vinylacetate, vinylchloride, vinylidene chloride, styrene,  $\alpha$ -methyl styrene etc. Suitable aryldiazosulfonate polymers for use in the present invention have the following formula:

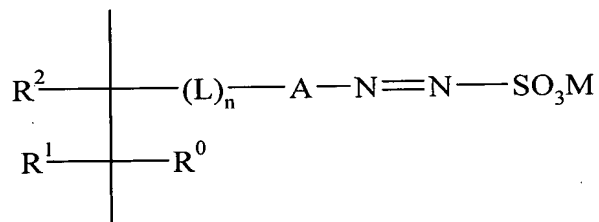


wherein  $\text{R}^{0,1,2}$  each independently represent hydrogen, an alkyl group, a nitrile or a halogen, e.g. Cl, L represents a divalent linking group, n represents 0 or 1, A represents an aryl group and M represents a cation. L preferably represents divalent linking group selected from the group consisting of  $-\text{X}_t\text{---CONR}^3-$ ,  $-\text{X}_t\text{---COO}-$ ,  $-\text{X}-$  and  $-\text{X}_t\text{---CO}-$ , wherein t represents 0 or 1,  $\text{R}^3$  represents hydrogen, an alkyl group or an aryl group, X represents an alkylene group, an arylene group, an alkyleneoxy group, an aryleneoxy group, an alkyleneithio group, an aryleneithio group, an alkyleneamino group, an aryleneamino group, oxygen, sulfur or an aminogroup. A preferably represents an unsubstituted aryl group, e.g. an unsubstituted phenyl group or an aryl group, e.g. phenyl, substituted with one or more alkyl group, aryl group, alkoxy group, aryloxy group or amino group. M preferably represents a cation such as  $\text{NH}_4^+$  or a metal ion such as a cation of Al, Cu, Zn, an alkaline earth metal or alkali metal.




[0031] Suitable aryldiazosulfonate monomers for preparing the above polymers are disclosed in EP-A 339393, EP-A 507008 and EP-A 771645. Specific examples are:

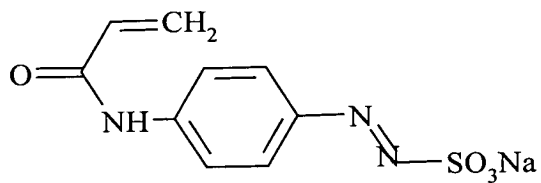


M1

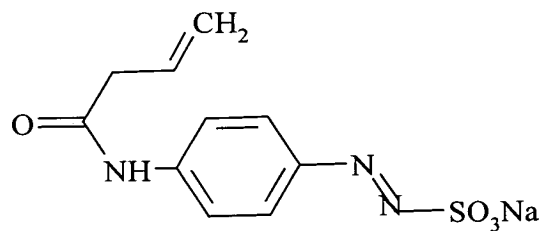


M2

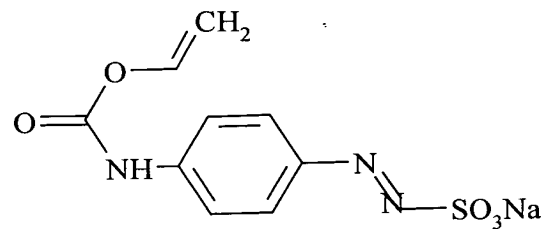


M3

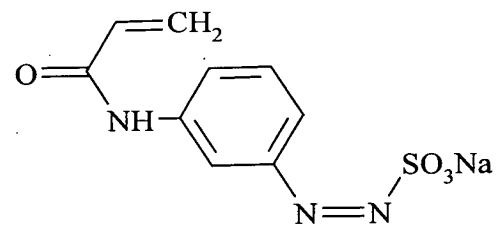


M4

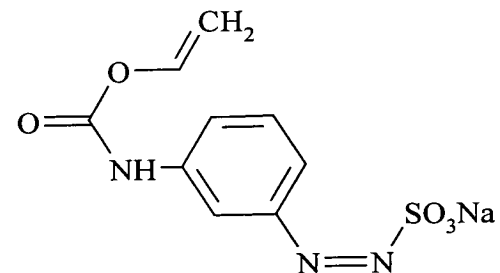


M5

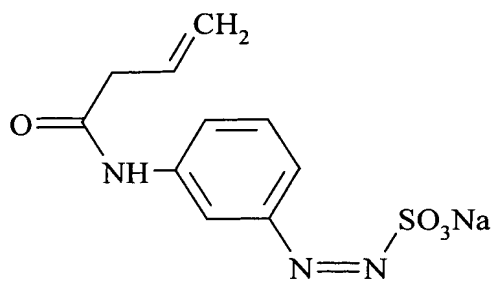


M6

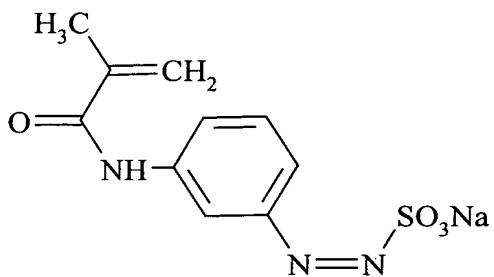


M7

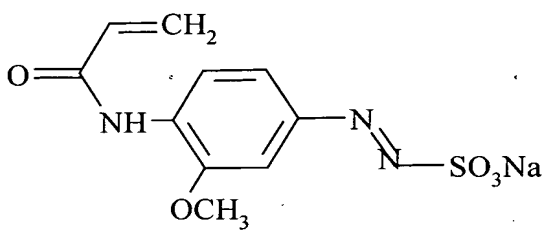


M8

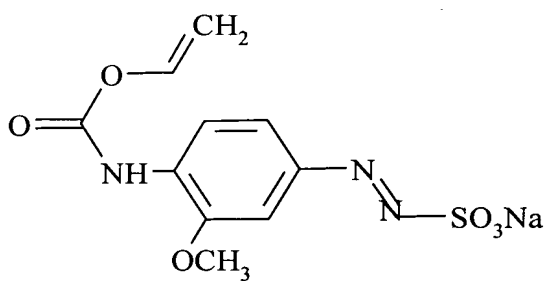


M9

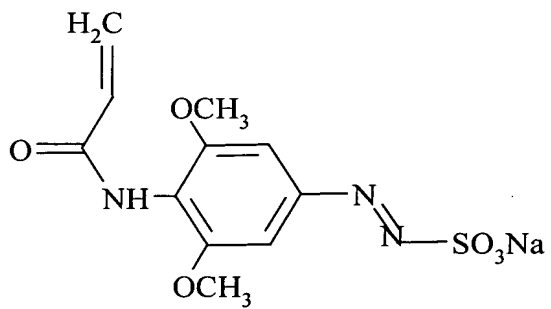


M10

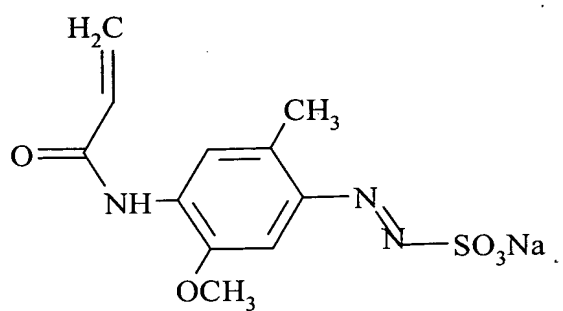


M11

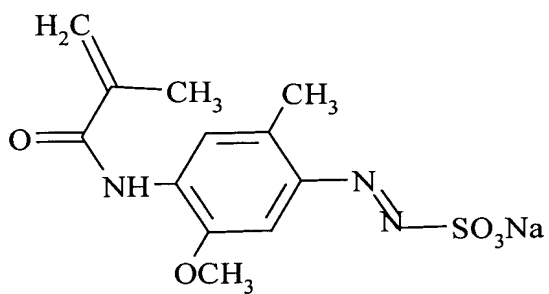


M12

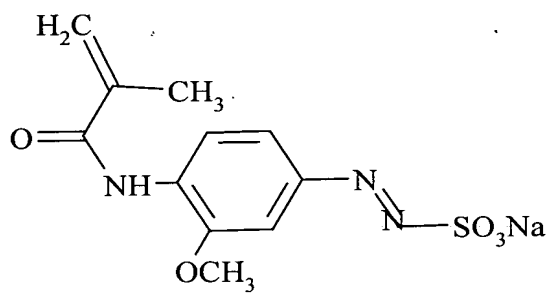


M13

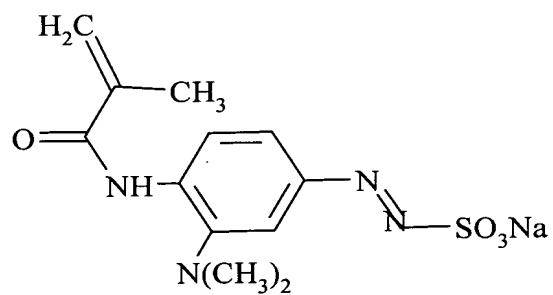


M14

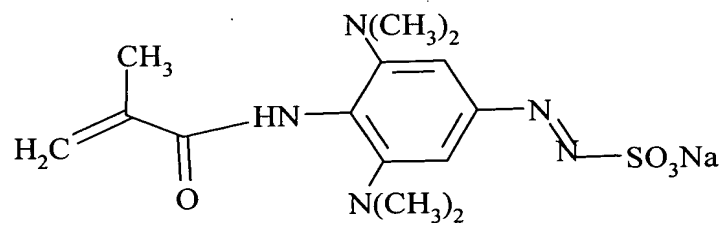


M15




M16

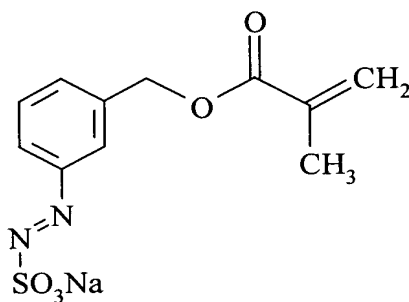


M17

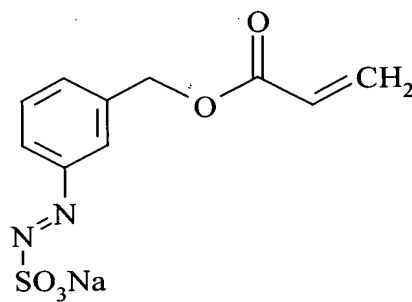

M18



M19

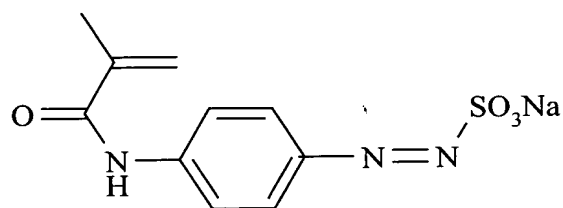

M20

**[0032]** The imaging material may also comprise other layers provided on the lithographic base, in addition to the image-recording layer. The light absorbing compound

may be present in another layer close to the layer which contains the other ingredients mentioned above, such as the hydrophobic thermoplastic polymer particles and the aryldiazosulfonate polymer. Or the imaging material may comprise a protective top layer which is removable by the single-fluid ink and which provides protection against handling or mechanical damage. A suitable protective top layer comprises polyvinylalcohol.

[0033] Single-fluid inks which are suitable for use in the method of the present invention have been described in U.S. Pat. 4,045,232; U.S. Pat. 4,981,517 and U.S. Pat. 6,140,392. Single-fluid ink is generally understood as an emulsion of an ink phase in a polar phase, or vice-versa, an emulsion of a polar phase in an ink phase. The ink phase is also called the hydrophobic or oleophilic phase. The polar phase preferably comprises at least 50%, more preferably at least 70% and even more preferably at least 90% of a non-aqueous, polar liquid. In a most preferred embodiment, the polar phase consists of an organic, polar liquid and comprises essentially no water. The polar liquid is preferably a polyol. A highly preferred single-fluid ink has been described in WO 00/32705, of which the relevant content is reproduced hereinafter.

Le  
ai  
[0034] The hydrophobic phase preferably comprises a vinyl resin having carboxyl functionality. The term "vinyl resin" includes polymers prepared by chain reaction polymerization, or addition polymerization, through carbon-carbon double bonds, using vinyl monomers and monomers copolymerizable with vinyl monomers. Typical vinyl monomers include, without limitation, vinyl esters, acrylic and methacrylic monomers, and vinyl aromatic monomers including styrene. The vinyl polymers may be branched by including in the polymerization reaction monomers that have two reaction sites. When the vinyl polymer is branched, it nonetheless remains usefully soluble. By "soluble" it is meant that the polymer can be diluted with one or more solvents. (By contrast, polymers may be crosslinked into insoluble, three-dimensional network structures that are only be swelled by solvents.) The branched vinyl resins retain solvent dilutability in spite of significant branching.

[0035] The carboxyl-functional vinyl polymers may be prepared by polymerization of a monomer mixture that includes at least one acid-functional monomer or at least one monomer that has a group that is converted to an acid group following polymerization, such as an anhydride group. Examples of acid-functional or anhydride-functional monomers include, without limitation,  $\alpha,\beta$ -ethylenically unsaturated monocarboxylic acids containing 3 to 5 carbon atoms such as acrylic, methacrylic, and crotonic acids;  $\alpha,\beta$ -ethylenically

unsaturated dicarboxylic acids containing 4 to 6 carbon atoms and the anhydrides and monoesters those acids, such as maleic anhydride, and fumaric acid; and acid-functional derivatives of copolymerizable monomers, such as the hydroxylethyl acrylate half-ester of succinic acid.

**[0036]** It is preferred to include an acid-functional monomer such as acrylic acid, methacrylic acid, or crotonic acid, or an anhydride monomer such as maleic anhydride or itaconic anhydride that may be hydrated after polymerization to generate acid groups. It is preferred for the acid-functional vinyl polymer to have an acid number of at least about 3 mg KOH per gram nonvolatile, preferably an acid number of from about 6 to about 30 mg KOH per gram nonvolatile, and more preferably an acid number of from about 8 to about 25 mg KOH per gram nonvolatile, based upon the nonvolatile weight of the vinyl polymer.

**[0037]** In a preferred embodiment, the acid-functional polymers are significantly branched. The inks used in the present invention preferably include a vinyl polymer that is branched but usefully soluble. The branched vinyl polymers may be diluted, rather than swollen, by addition of solvent. The branching may be accomplished by at least two methods. In a first method, a monomer with two or more polymerizable double bonds is included in the polymerization reaction. In a second method, a pair of ethylenically unsaturated monomers, each of which has in addition to the polymerizable double bond at least one additional functionality reactive with the additional functionality on the other monomer, are included in the monomer mixture being polymerized. Preferably, the reaction of the additional functional groups takes place during the polymerization reaction, although this is not seen as critical and the reaction of the additional functional groups may be carried out partially or wholly before or after polymerization. A variety of such pairs of mutually reactive groups are possible. Illustrative examples of such pairs of reactive groups include, without limitation, epoxide and carboxyl groups, amine and carboxyl groups, epoxide and amine groups, epoxide and anhydride groups, amine and anhydride groups, hydroxyl and carboxyl or anhydride groups, amine and acid chloride groups, alkylene-imine and carboxyl groups, organoalkoxysilane and carboxyl groups, isocyanate and hydroxyl groups, cyclic carbonate and amine groups, isocyanate and amine groups, and so on. When carboxyl or anhydride groups are included as one of the reactive groups, they are used in a sufficient excess to provide the required carboxyl functionality in the vinyl resin. Specific examples of such monomers include, without limitation, glycidyl (meth)acrylate with (meth)acrylic acid, N-alkoxymethylated acrylamides (which react with themselves) such as N-

isobutoxymethylated acrylamide, gamma-methacryloxytrialkoxysilane (which reacts with itself), and combinations thereof.

**[0038]** Preferably, the vinyl resin is polymerized using at least one monomer having two or more polymerizable ethylenically unsaturated bonds, and particularly preferably from two to about four polymerizable ethylenically unsaturated bonds. Illustrative examples of monomers having two or more ethylenically unsaturated moieties include, without limitation, (meth)acrylate esters of polyols such as 1,4-butanediol di(meth)acrylate, 1,6-hexanediol di(meth)acrylate, neopentyl glycol di(meth)acrylate, trimethylol propane tri(meth)acrylate, tetramethylol methane tetra(meth)acrylate, pentaerythritol tetra(meth)acrylate, dipentaerythritol penta(meth)acrylate, dipentaerythritol hexa(meth)acrylate, alkylene glycol di(meth)acrylates and polyalkylene glycol di(meth)acrylates, such as ethylene glycol di(meth)acrylate, butylene glycol di(meth)acrylate, diethylene glycol di(meth)acrylate, triethylene glycol di(meth)acrylate, and polyethylene glycol di(meth)acrylate; divinylbenzene, allyl methacrylate, diallyl phthalate, diallyl terephthalate, and the like, singly or in combinations of two or more. Of these, divinylbenzene, butylene glycol dimethacrylate, butanediol dimethacrylate, trimethylolpropane triacrylate, and pentaerythritol tetra-acrylate are highly preferred, and divinylbenzene is still more highly preferred.

**[0039]** Preferably, the branched vinyl polymer is polymerized using at least about 0.008 equivalents per 100 grams of monomer polymerized of at least one monomer having at least two ethylenically unsaturated polymerizable bonds, or 0.004 equivalents per 100 grams of monomer polymerized of each of two monomers having mutually reactive groups in addition to an ethylenically unsaturated polymerizable bond. Preferably, the branched vinyl polymer is polymerized using from about 0.012 to about 0.08 equivalents, and more preferably from about 0.016 to about 0.064 equivalents per 100 grams of monomer polymerized of the polyfunctional monomer or monomers having at least two ethylenically unsaturated polymerizable bonds or of the pair of monomers having one polymerization bond and one additional mutually reactive group.

**[0040]** The polyfunctional monomer or monomers preferably have from two to four ethylenically unsaturated polymerizable bonds, and more preferably two ethylenically unsaturated polymerizable bonds. In one embodiment it is preferred for the branched vinyl resin to be prepared by polymerizing a mixture of monomers that includes from about 0.5% to about 6%, more preferably from about 1.2% to about 6%, yet more preferably from about

1.2% to about 4%, and even more preferably from about 1.5% to about 3.25% divinylbenzene based on the total weight of the monomers polymerized. (Commercial grades of divinylbenzene include mono-functional and/or non-functional material. The amount of the commercial material needed to provide the indicated percentages must be calculated. For example, 5% by weight of a material that is 80% by weight divinylbenzene/20% mono-functional monomers would provide 4% by weight of the divinylbenzene fraction.)

**[0041]** The optimum amount of (1) divinylbenzene or other monomer having at least two polymerizable ethylenically unsaturated bond or (2) pair of monomers having polymerizable group and additional, mutually-reactive groups that are included in the polymerization mixture depends to some extent upon the particular reaction conditions, such as the rate of addition of monomers during polymerization, the solvency of the polymer being formed in the reaction medium chosen, the amount of monomers relative to the reaction medium, the half-life of the initiator chosen at the reaction temperature and the amount of initiator by weight of the monomers, and may be determined by straightforward testing.

**[0042]** Other monomers that may be polymerized along with the polyfunctional monomers and the acid-functional monomers (or monomers with groups that can later be converted to acid groups) include, without limitation, esters of  $\alpha,\beta$ -ethylenically unsaturated monocarboxylic acids containing 3 to 5 carbon atoms such as esters of acrylic, methacrylic, and crotonic acids;  $\alpha,\beta$ -ethylenically unsaturated dicarboxylic acids containing 4 to 6 carbon atoms and the anhydrides, monoesters, and diesters of those acids; vinyl esters, vinyl ethers, vinyl ketones, and aromatic or heterocyclic aliphatic vinyl compounds. Representative examples of suitable esters of acrylic, methacrylic, and crotonic acids include, without limitation, those esters from reaction with saturated aliphatic and cycloaliphatic alcohols containing 1 to 20 carbon atoms, such as methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl, tert-butyl, 2-ethylhexyl, lauryl, stearyl, cyclohexyl, trimethylcyclohexyl, tetrahydrofurfuryl, stearyl, sulfoethyl, and isobornyl acrylates, methacrylates, and crotonates; and polyalkylene glycol acrylates and methacrylates. Representative examples of other ethylenically unsaturated polymerizable monomers include, without limitation, such compounds as fumaric, maleic, and itaconic anhydrides, monoesters, and diesters with alcohols such as methanol, ethanol, propanol, isopropanol, butanol, isobutanol, and tert-butanol. Representative examples of polymerization vinyl monomers include, without limitation, such compounds as vinyl acetate, vinyl propionate,



vinyl ethers such as vinyl ethyl ether, vinyl and vinylidene halides, and vinyl ethyl ketone. Representative examples of aromatic or heterocyclic aliphatic vinyl compounds include, without limitation, such compounds as styrene,  $\alpha$ -methyl styrene, vinyl toluene, tert-butyl styrene, and 2-vinyl pyrrolidone. The selection of monomers is made on the basis of various factors commonly considered in making ink varnishes, including the desired glass transition temperature and the desired dilutability of the resulting polymer in the solvent or solvent system of the ink composition.

**[0043]** The preferred vinyl polymers may be prepared by using conventional techniques, preferably free radical polymerization in a semi-batch process. For instance, the monomers, initiator(s), and any chain transfer agent may be fed at a controlled rate into a suitable heated reactor charged with solvent in a semi-batch process. Typical free radical sources are organic peroxides, including dialkyl peroxides, such as di-tert-butyl peroxide and dicumyl peroxide, peroxyesters, such as tert-butyl peroxy 2-ethylhexanoate and tert-butyl peroxy pivalate; peroxy carbonates and peroxydicarbonates, such as tert-butyl peroxy isopropyl carbonate, di-2-ethylhexyl peroxydicarbonate and dicyclohexyl peroxydicarbonate; diacyl peroxides, such as dibenzoyl peroxide and dilauroyl peroxide; hydroperoxides, such as cumene hydroperoxide and tert-butyl hydroperoxide; ketone peroxides, such as cyclohexanone peroxide and methylisobutyl ketone peroxide; and peroxyketals, such as 1,1-bis(tert-butyl peroxy)-3,5,5-trimethylcyclohexane and 1,1-bis(tert-butyl peroxy)cyclohexane; as well as azo compounds such as 2,2'-azobis(2-methylbutanenitrile), 2,2'-azobis(2-methyl)propionitrile, and 1,1'-azobis(cyclohexanecarbonitrile). Organic peroxides are preferred. Particularly preferred is tert-butyl peroxy isopropyl carbonate. Chain transfer agents may also be used in the polymerization. Typical chain transfer agents are mercaptans such as octyl mercaptan, n- or tert-dodecyl mercaptan, thiosalicylic acid, mercaptocarboxylic acids such as mercaptoacetic acid and mercaptopropionic acid and their esters, and mercaptoethanol; halogenated compounds; and dimeric  $\alpha$ -methyl styrene. Preferably, no chain transfer agent is included because of odor and other known drawbacks. The particular initiator and amount of initiator used depends upon factors known to the person skilled in the art, such as the reaction temperature, the amount and type of solvent (in the case of a solution polymerization), the half-life of the initiator, and so on.

**[0044]** The addition polymerization is usually carried out in solution at temperatures from about 20 °C to about 300 °C, preferably from about 150 °C to about 200 °C, more preferably from about 160 °C to about 165 °C. Preferably, the polymerization is carried out with approximately the same reaction temperature and using the same initiator(s)

throughout. The initiator should be chosen so its half-life at the reaction temperature is preferably no more than about thirty minutes, particularly preferably no more than about five minutes, and yet more preferably no more than about two minutes. Particularly preferred are initiators having a half-life of less than about one minute at a temperature of from about 150 °C to about 200 °C. In general, more of the branching monomer can be included when the initiator half-life is shorter and/or when more initiator is used. The vinyl polymer vehicles used in the ink preferably have little or no residual (unreacted) monomer content. In particular, the vinyl vehicles are preferably substantially free of residual monomer, i.e., have less than about 0.5% residual monomer, and even more preferably less than about 0.1% residual monomer by weight, based on the total weight of the monomers being polymerized.

**[0045]** In a semi-batch process, the monomer and initiator is added to the polymerization reactor over a period of time, preferably at a constant rate. Typically, the add times are from about 1 to about 10 hours, and add times of from about three to about five hours are common. Longer add times typically produce lower number average molecular weights. Lower number average molecular weights may also be produced by increasing the ratio of solvent to monomer or by using a stronger solvent for the resulting polymer.

**[0046]** In general, the branched vinyl polymer used in the ink has a low number average molecular weight and a broad polydispersity. The number average molecular weight and weight average molecular weight of a vinyl resin used in the ink can be determined by gel permeation chromatography using polystyrene standards, which are available for up to 6 million weight average molecular weight, according to well-accepted methods. Polydispersity is defined as the ratio of  $M_w/M_n$ . In a preferred embodiment, the vinyl polymer has a number average molecular weight ( $M_n$ ) of at least about 1000, and more preferably at least about 2000. The number average molecular weight is also preferably less than about 15,000, more preferably less than about 10,000, and even more preferably less than about 8500. A preferred range for  $M_n$  is from about 1000 to about 10,000, a more preferred range for  $M_n$  is from about 2000 to about 8500, and an even more preferred range is from about 4000 to about 8000. The weight average molecular weight should be at least about 30,000, preferably at least about 100,000. The weight average molecular weight ( $M_w$ ) is preferably up to about 60 million, based upon a GPC determination using an available standard having 6 million weight average molecular weight. A preferred range for  $M_w$  is from about 30,000 to about 55 million, a more preferred

range for  $M_w$  is from about 100,000 to about 1 million, and a still more preferred range is from about 100,000 to about 300,000. Resins having ultra-high molecular weight shoulders (above about 45 million), which can be seen by GPC, are preferably avoided for the  $M_w$  range of from about 100,000 to about 300,000. The polydispersity, or ratio of  $M_w/M_n$ , may be up to about 10,000, preferably up to about 1000. The polydispersity is preferably at least about 15, particularly preferably at least about 50. The polydispersity preferably falls in the range of from about 15 to about 1000, and more preferably it falls in a range of from about 50 to about 800.

*La*  
*A2*  
[0047] The theoretical glass transition temperature can be adjusted according to methods well-known in the art through selection and apportionment of the commoners. In a preferred embodiment, the theoretical  $T_g$  is above room temperature, and preferably the theoretical  $T_g$  is at least about 60 °C, more preferably at least about 70 °C. The methods and compositions of the present invention preferably employ vinyl polymers having a  $T_g$  of from about 50 °C to about 125 °C, more preferably from about 60 °C to about 100 °C, and even more preferably from about 70 °C to about 90 °C.

[0048] In one embodiment of the single-fluid ink, the acid-functional vinyl polymer, which may be a branched vinyl polymer, is combined with other resins in the ink composition. Examples of suitable other resins that may be combined with the acid-functional vinyl polymer include, without limitation, polyester and alkyd resins, phenolic resins, rosins, cellulotics, and derivatives of these such as rosin-modified phenolics, phenolic-modified rosins, hydrocarbon-modified rosins, maleic modified rosin, fumaric modified rosins; hydrocarbon resins, other acrylic or vinyl resins, polyamide resins, and so on. Such resins or polymers may be included in amounts of up to about 6 parts by weight to about 1 part by weight of the acid-functional vinyl polymer, based upon the nonvolatile weights of the resins.

[0049] In addition to the acid-functional vinyl resin and any optional second resin, the ink compositions preferably include one or more solvents. In a preferred embodiment of the single-fluid ink, the branched vinyl resin forms a solution or apparent solution having no apparent turbidity in the solvent or solvents of the ink formulation. The particular solvents and amount of solvent included is determined by the ink viscosity, body, and tack desired. In general, non-oxygenated solvents or solvents with low Kauri-butanol (KB) values are used for inks that will be in contact with rubber parts such as rubber rollers during the lithographic process, to avoid affecting the rubber. Suitable solvents for inks that will

contact rubber parts include, without limitation, aliphatic hydrocarbons such as petroleum distillate fractions and normal and iso paraffinic solvents with limited aromatic character. For example, petroleum middle distillate fractions such as those available under the tradename Magie Sol, available from Magie Bros. Oil Company, a subsidiary of Pennsylvania Refining Company, Franklin Park, Ill., under the tradename ExxPrint, available from Exxon Chemical Co., Houston, Tex., and from Golden Bear Oil Specialties, Oildale, Calif., Total Petroleum Inc., Denver, Colo., and Calumet Lubricants Co., Indianapolis, Ind. may be used. In addition or alternatively, soybean oil or other vegetable oils may be included.

**[0050]** When non-oxygenated solvents such as these are used, it is generally necessary to include a sufficient amount of at least one monomer having a substantial affinity for aliphatic solvents in order to obtain the desired solvency of the preferred branched vinyl polymer. In general, acrylic ester monomers having at least six carbons in the alcohol portion of the ester or styrene or alkylated styrene, such as tert-butyl styrene, may be included in the polymerized monomers for this purpose. In a preferred embodiment, an ink composition with non-oxygenated solvents includes a branched vinyl resin polymerized from a monomer mixture including at least about 20%, preferably from about 20% to about 40%, and more preferably from about 20% to about 25% of a monomer that promotes aliphatic solubility such as stearyl methacrylate or t-butyl styrene, with stearyl methacrylate being a preferred such monomer. It is also preferred to include at least about 55% percent styrene, preferably from about 55% to about 80% styrene, and more preferably from about 60% to about 70% styrene. Methyl methacrylate or other monomers may also be used to reduce solvent tolerance in aliphatic solvent, if desired. All percentages are by weight, based upon the total weight of the monomer mixture polymerized. Among preferred monomer compositions for vinyl polymers for lithographic inks are those including a (meth)acrylic ester of an alcohol having 8-20 carbon atoms such as stearyl methacrylate, styrene, divinylbenzene, and (meth)acrylic acid. In a preferred embodiment, a branched vinyl for a lithographic printing ink is made with from about 15, preferably about 20, to about 30, preferably about 25, weight percent of a (meth)acrylic ester of an alcohol having 8-20 carbon atoms, especially stearyl methacrylate; from about 50, preferably about 60, to about 80, preferably about 75, weight percent of a styrenic monomer, especially styrene itself; an amount of divinylbenzene as indicated above; and from about 0.5, preferably about 2.5, to about 5, preferably about 4, weight percent of acrylic acid or, more preferably, of methacrylic acid.

**[0051]** Preferably, the solvent or solvent mixture will have a boiling point of at least about 100 °C and preferably not more than about 550 °C. Offset printing inks may use solvents with boiling point above about 200 °C. News inks usually are formulated with from about 20 to about 85 percent by weight of solvents such as mineral oils, vegetable oils, and high boiling petroleum distillates. The amount of solvent also varies according to the type of ink composition (that is, whether the ink is for newsprint, heatset, sheetfed, etc.), the specific solvents used, and other factors known in the art. Typically the solvent content for lithographic inks is up to about 60%, which may include oils as part of the solvent package. Usually, at least about 35% solvent is present in lithographic ink. When used to formulate the preferred single-fluid ink compositions, these varnishes or vehicles, including the branched vinyl resins, are typically clear, apparent solutions.

**[0052]** The ink compositions will usually include one or more pigments. The number and kinds of pigments will depend upon the kind of ink being formulated. News ink compositions typically will include only one or only a few pigments, such as carbon black, while gravure inks may include a more complicated pigment package and may be formulated in many colors, including colors with special effects such as pearlescence or metallic effect. Lithographic printing inks are typically used in four colors--magenta, yellow, black, and cyan, and may be formulated for pearlescence or metallic effect. Any of the customary inorganic and organic pigments may be used in the ink compositions of the present invention. Alternatively, the compositions may be used as overprint lacquers or varnishes. The overprint lacquers (air drying) or varnishes (curing) are intended to be clear or transparent and thus opaque pigments are not included.

**[0053]** Lithographic ink compositions used in the invention are preferably formulated as single-fluid inks having an oil-based continuous phase that contains the acid-functional vinyl vehicle and a polyol discontinuous phase that contains a liquid polyol. The vinyl polymer phase is relatively stable toward the polyol phase. The stability is such that the two phases do not separate in the fountain. During application of the ink, however, the emulsion breaks and the polyol comes to the surface, wetting out the areas of the plate that are not to receive ink. Inks that are stable in the fountain but break quickly to separate on the plate print cleanly without toning and provide consistent transfer characteristics. Proper stability also may depend upon the particular acid-functional vinyl polymer and the particular polyol chosen. The acid number and molecular weight may be adjusted to provide the desired stability.

**[0054]** Higher acid number vinyl resins can be used in lower amounts, but the acid number cannot be excessively high or else the vinyl polymer will not be sufficiently soluble in the hydrocarbon solvent. In general, it is believed that an increase in acid number of the acid-functional vinyl resin should be accompanied by a decrease in the amount of such resin included in the hydrophobic phase.

**[0055]** Polyethylene glycol oligomers such as diethylene glycol, triethylene glycol, and tetraethylene glycol, as well as ethylene glycol, propylene glycol, and dipropylene glycol, are examples of liquid polyols that are preferred for the polyol phase of the single-fluid ink used in the invention. The polyol phase may, of course, include mixtures of different liquid polyols. In general, lower acid number vinyl or acrylic polymers are used with higher molecular weight polyols. The polyol phase may include further materials. A weak acid such as citric acid, tartaric acid, or tannic acid, or a weak base such as triethanolamine, may be included in an amount of from about 0.01 weight percent up to about 2 weight percent of the ink composition. Certain salts such as magnesium nitrate may be included in amounts of from about 0.01 weight percent to about 0.5 weight percent, preferably from about 0.08 to about 1.5 weight percent, based on the weight of the ink composition, to help protect the plate and extend the life of the plate. A wetting agent, such as polyvinylpyrrolidone, may be added to aid in wetting of the plate. From about 0.5 weight percent to about 1.5 weight percent of the polyvinylpyrrolidone is included, based on the weight of the ink composition.

**[0056]** Single-fluid inks may be formulated with from about 5% to about 50%, preferably from about 10% to about 35%, and particularly preferably from about 20% to about 30% of polyol phase by weight based on the total weight of the ink composition. Unless another means for cooling is provided, there is preferably a sufficient amount of polyol in the ink composition to keep the plate at a workably cool temperature. The amount of polyol phase necessary to achieve good toning and printing results depends upon the kind of plate being used and may be determined by straightforward testing. Up to about 4 or 5% by weight of water may be included in the polyol phase mixture to aid in dissolving or homogenizing the ingredients of the polyol phase.

**[0057]** It will be appreciated by the skilled artisan that other additives known in the art that may be included in the ink compositions used in the invention, so long as such additives do not significantly detract from the benefits of the present invention. Illustrative examples of these include, without limitation, pour point depressants, surfactants, wetting agents, waxes, emulsifying agents and dispersing agents, defoamers, antioxidants, UV

absorbers, dryers (e.g., for formulations containing vegetable oils), flow agents and other rheology modifiers, gloss enhancers, and anti-settling agents. When included, additives are typically included in amounts of at least about 0.001% of the ink composition, and may be included in amount of about 7% by weight or more of the ink composition.

**[0058]** The imaging material is automatically supplied to a cylinder of a printing press by unwinding the material from a supply spool or from a supply roll, i.e. a web of imaging material rolled on said supply spool. The unwound imaging material is wrapped around a press cylinder, which is preferably the plate cylinder that holds the printing master during printing. The supply roll is preferably located within the plate cylinder as described in EP-A 640 478. Alternatively, the supply roll can also be located outside the cylinder and then, the unwound material is wrapped around the cylinder and preferably automatically cut from the web on the supply roll. After printing, the used material is preferably wound on an uptake roll or spool, which preferably is also integrated in the cylinder. Technical details of a preferred embodiment of such an integrated supply and an uptake roll as well as of the associated driving mechanism and tension control mechanism can be found in EP-A 640 478.

**[0059]** The imaging material used in the present invention is exposed on-press to heat or to light, i.e. while the material is mounted on a press cylinder, preferably the plate cylinder which holds the printing master during printing. Exposure can be done by e.g. a thermal head, LEDs or a laser head. Preferably, one or more lasers such as a He/Ne laser, an Ar lasers or a violet laser diode are used. Most preferably, the light used for the exposure is not visible light so that daylight-stable materials can be used, e.g. UV (laser) light or a laser emitting near infrared light having a wavelength in the range from about 700 to about 1500 nm is used, e.g. a semiconductor laser diode, a Nd:YAG or a Nd:YLF laser. The required laser power depends on the sensitivity of the image-recording layer, the pixel dwell time of the laser beam, which is determined by the spot diameter (typical value of modern plate-setters at  $1/e^2$  of maximum intensity : 10-25  $\mu\text{m}$ ), the scan speed and the resolution of the exposure apparatus (i.e. the number of addressable pixels per unit of linear distance, often expressed in dots per inch or dpi; typical value : 1000-4000 dpi). More technical details of on-press exposure apparatuses are described in e.g. U.S. Pat. 5,174,205 and U.S. Pat. 5,163,368.

**[0060]** After exposure, the image-recording layer is processed by supplying single-fluid ink, preferably by means of the inking rollers of the press that supply ink to the plate

cylinder. Preferably, the same single-fluid ink is used for the processing step and the subsequent printing step. In that embodiment, the steps of processing and printing are part of the same operation: after exposure, the printing process is started by feeding single-fluid ink to the material; after the first few revolutions of the print cylinder (typically less than 20, more preferably less than 10), the imaging layer is completely processed and subsequently, high-quality printed copies are obtained throughout the press run. As explained above, the areas of the image-recording layer, which are soluble in the single-fluid ink or which have been rendered soluble in the single-fluid ink by the exposure step, are removed during the processing step. Preferably, the removed components are transferred to the print paper.

**[0061]** The processing of the imaging material with single-fluid ink can be preceded by an optional step wherein the image-recording layer is first moistened or allowed to swell by the supply of water or an aqueous liquid, without thereby substantially removing the image-recording layer.



**[0062]** The following examples further illustrate the invention but, of course, should not be construed as in any way limiting its scope.

### EXAMPLE 1

#### 1. Preparation of a Vinyl Varnish

**[0063]** An amount of 44.19 parts by weight of Ketrul 220 (a petroleum middle distillate fraction available from Total Petroleum, Inc.) is charged to a glass reactor equipped with stirrer, nitrogen inlet, total reflux condenser, and monomer inlet. The solvent is heated to 160°C with stirring under a blanket of nitrogen. A monomer mixture of 36.01 parts by weight styrene, 12.27 parts by weight stearyl methacrylate, 2.62 parts by weight divinylbenzene, 1.89 parts by weight methacrylic acid, and 2.79 parts by weight t-butyl peroxy isopropyl carbonate (75% solution in mineral spirits) is added to the reactor over a period of three hours. After the monomer addition is complete, 0.23 parts by weight of t-butyl peroxy isopropyl carbonate is added over a period of fifteen minutes. The temperature is held at 160°C for an additional two hours to allow for complete conversion of the monomer to polymer.

**[0064]** The measured amount of non-volatile matter (NVM) is 55%. The percent conversion, measured as NVM divided by the percent of the total weight of monomers, is 100.1. The acid number on solution is 12.0 mg KOH per gram. The viscosity is 30 Stokes (bubble tube, 54.4°C). The solvent tolerance is 230% and the NVM at cloud point is 16.7%.



## 2. Preparation of Single-Fluid Ink

**[0065]** 58.0 grams of the following Mixture A is added to 142.0 grams of the following Mixture B with stirring. The ink composition is mixed for 20 minutes on a dispersator, maintaining a vortex and holding the temperature under 60 °C. The ink composition has a single fall time Laray of 14 to 17 seconds for 500 grams at 30 °C.

Mixture A: Mix in a glass beaker until clear 181.0 grams of diethylene glycol, 8.0 grams of water, 0.4 grams of citric acid, and 0.4 grams of magnesium nitrate. Add 191.2 grams of diethylene glycol and mix until homogenous.

Mixture B: Mix, using a high-speed mixer, 46.0 grams of the above Vinyl Varnish, 4.0 grams of Blue Flush 12-FH-320 (available from CDR Corporation, Elizabethtown, Ky.) 1.0 gram technical grade Soy oil (available from Cargill, Chicago, Ill.) and 0.6 grams of an antioxidant. While mixing, add 34.4 grams of a hydrocarbon resin solution (60% LX-2600 in EXX-Print 283D, available from Neville), 27.0 grams of a carbon black (CSX-156 available from Cabot Corp.), and 1.0 gram of a polytetrafluoroethylene wax (Pinnacle 9500D, available from Carrol Scientific). Mix at a high speed for 30 minutes at 149 °C. Slow the mixing speed and add 27.0 grams of EXX-Print 588D (available from Exxon). Mill the premix in a shot mill to a suitable grind.

**[0066]** Mixture B has a Laray viscosity of 180 to 240 poise and a Laray yield of 800 to 1200 (according to test method ASTM D4040: Power Law-3 k, 1.5 k, 0.7 k, 0.3 k). Mixture B is tested on the Inkometer for one minute at 1200 rpm for a measured result of 25 to 29 units.

## 3. The lithographic base


**[0067]** A web of PET, having a thickness of 0.175 mm, was coated at a wet coating thickness of 50 µm with a layer from a 23.6 % aqueous coating solution having a pH of 4. After cooling for 30 sec at 10 °C, the layer was dried at a temperature of 50 °C with a moisture content of the air of 4 g/m<sup>3</sup> during at least 3 minutes. The resulting hydrophilic base layer contained 8990 mg/m<sup>2</sup> of TiO<sub>2</sub>, 900 mg/m<sup>2</sup> of SiO<sub>2</sub>, 990 mg/m<sup>2</sup> of polyvinylalcohol, 81.6 mg/m<sup>2</sup> of SAPONIN™, 36.8 mg/m<sup>2</sup> of HOSTAPON T™ and 605 mg/m<sup>2</sup> of FT248™.

**[0068]** SAPONIN is a nonionic surfactant mixture consisting of esters and polyglycosides, commercially available from Merck. HOSTAPON T is an anionic surfactant, commercially available from Hoechst AG. FT248 is an anionic perfluoro surfactant, commercially available from Bayer AG.

**[0069]** The above mentioned  $\text{TiO}_2$  and  $\text{SiO}_2$  were added to the coating solution as a dispersion in the polyvinylalcohol. The  $\text{TiO}_2$  dispersion had an average particle size of between 0.3 and 0.5  $\mu\text{m}$ . The polyvinyl alcohol was hydrolyzed polyvinyl acetate, commercially available from Wacker Chemie GmbH, Germany under the trademark POLYVIOL WX<sup>TM</sup>. The  $\text{SiO}_2$  mentioned above was added as a dispersion of hydrolyzed tetramethyl orthosilicate.

#### 4. The image-recording layer

**[0070]** A 2.61 wt.% solution in water was prepared by mixing a polystyrene latex, a heat absorbing compound and a hydrophilic binder. This solution was coated on the hydrophilic base layer of the above described PET support. After drying, the image-recording layer had a thickness of 0.83  $\mu\text{m}$  and contained 75 wt.% of the polystyrene latex, 10 wt.% of the infrared dye IR-1, and 15 wt.% of polyacrylic acid (Glascol E15 commercially available at N.V. Allied Colloids Belgium) as hydrophilic binder.

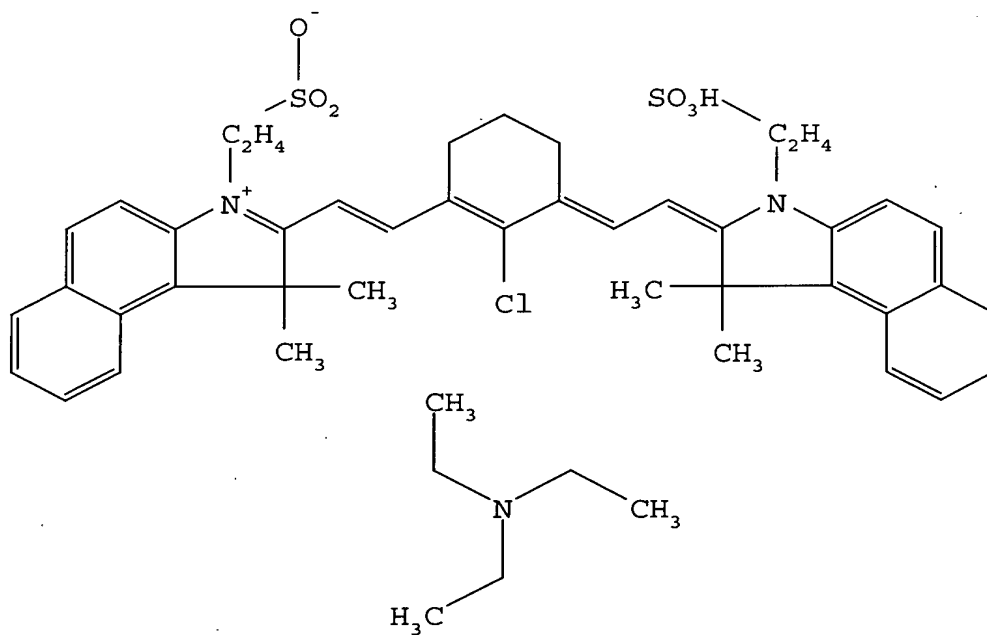

IR-1

## 5. Evaluation

[0071] One color station of a Quickmaster DI 46-4 (trade mark of Heidelberger Druckmaschinen, Germany), which is a driographic digital press containing an integrated infrared laser diode exposure system and a supply and an uptake spool inside the plate cylinder, was loaded with the above imaging material. After exposure, the press was started and the above described single-fluid ink was supplied to the image-recording layer. After 10 revolutions, the processing step was complete and clear prints were obtained with no ink uptake in the non-exposed areas.

[0072] All references, including publications, patent applications, and patents, cited herein are hereby incorporated by reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety herein.

[0073] The use of the terms "a" and "an" and "the" and similar referents in the context of describing the invention (especially in the context of the following claims) are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The terms "comprising," "having," "including," and "containing" are to be construed as open-ended terms (i.e., meaning "including, but not limited to,") unless otherwise noted. Recitation of ranges of values herein are merely intended to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., "such as") provided herein, is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention.

[0074] Preferred embodiments of this invention are described herein, including the best mode known to the inventors for carrying out the invention. Variations of those preferred embodiments may become apparent to those of ordinary skill in the art upon reading the foregoing description. The inventors expect skilled artisans to employ such variations as appropriate, and the inventors intend for the invention to be practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications and

equivalents of the subject matter recited in the claims appended hereto as permitted by applicable law. Moreover, any combination of the above-described elements in all possible variations thereof is encompassed by the invention unless otherwise indicated herein or otherwise clearly contradicted by context.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224